

Acceleration Mechanical Impact Test Device

-----the table size can be customized

Application:

Half Sine Acceleration Shock Tester is designed for measuring and ensure shock performance of products and packages. It can do normal shock test with half sine wave, square wave, sawtooth wave etc., simulate products under real environment shock conditions, thus improve and perfect products package structure.

Technical Parameters:

Machine Name	Half Sine Acceleration Shock Tester			
Model	SS-5	SS-10	SS-25	SS-50
Load Capacity (Kg)	5	10	25	50
Table Size (mm)	120x120	200x200	350x350	450x450
Pulse Acceleration (m/s ²)(half sine)	150~15000	150~15000	150~15000	150~6000
Pulse width(Half Sine Wave)	0.5~18	0.6~18	0.8~25	1.5~30
Drive Mode	Mechanical drive			
External Dimension WxHxD (mm)	800x2200x900	800x2200x900	850x2250x950	1000x2600x1300



AI SI LI (CHINA) TEST EQUIPMENT CO., LTD

Tel.:0086-769-23164266

Fax:0086-769-22851784

E-mail: sales8@aslitesting.com

Company Add.:Building C,JinHui Industrial Park, LiXin town,East City district 523125,DongGuan City,China

Pictures



Apperance



Shock Absorber pad



Test Curve

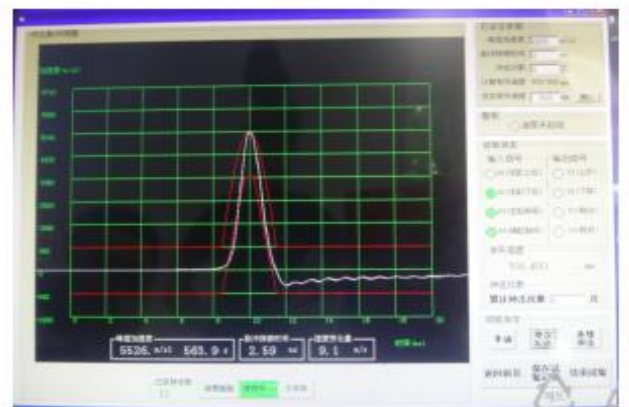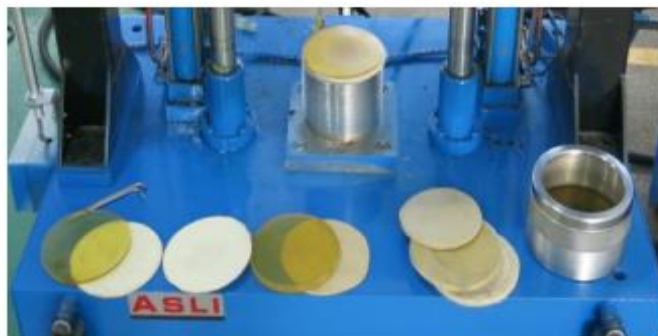

® AI SI Li (CHINA) TEST EQUIPMENT CO., LTD

Tel.:0086-769-23164266

Fax:0086-769-22851784

E-mail: sales8@aslitesting.com

Company Add.:Building C,JinHui Industrial Park, LiXin town,East City district 523125,DongGuan City,China